


1. IP Phone Installation


EQ-PZ200H supports POE supply and power adapter(DC12V1.5A).




2. If connect to a POE Switch with DHCP, go to Settings>Status>Network Status to check the IP.

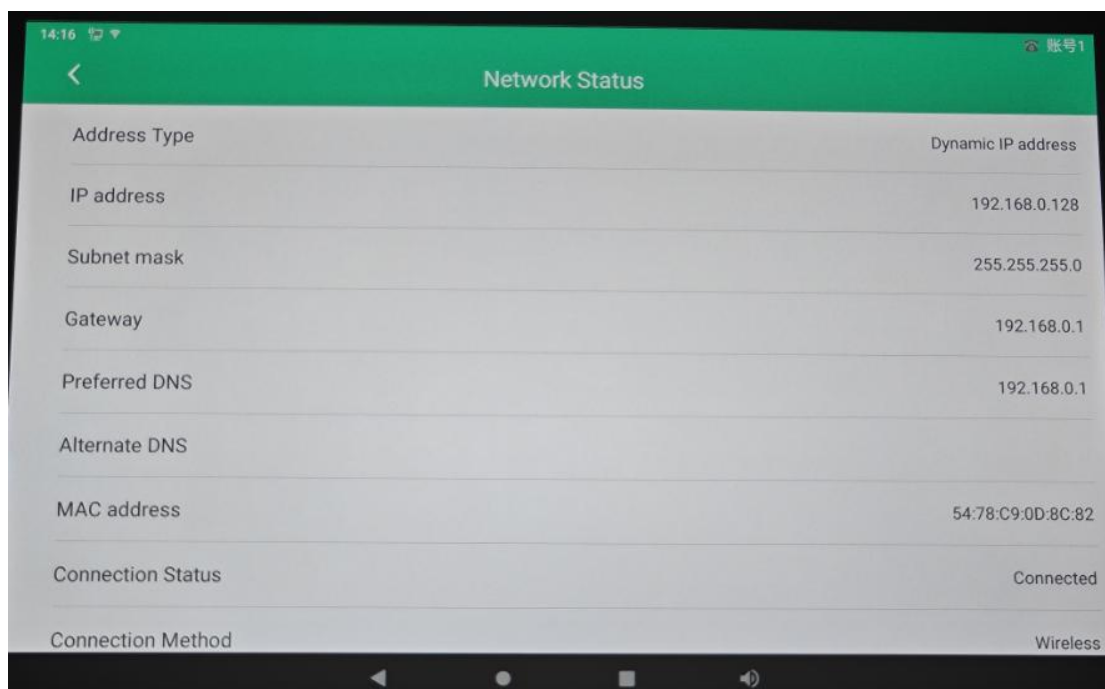


Without DHCP, unable to get a IP. We should set a IP manually. Go to **Network and Bluetooth>Ethernet**, change the Network mode to Manual, modify the IP and click on OK.

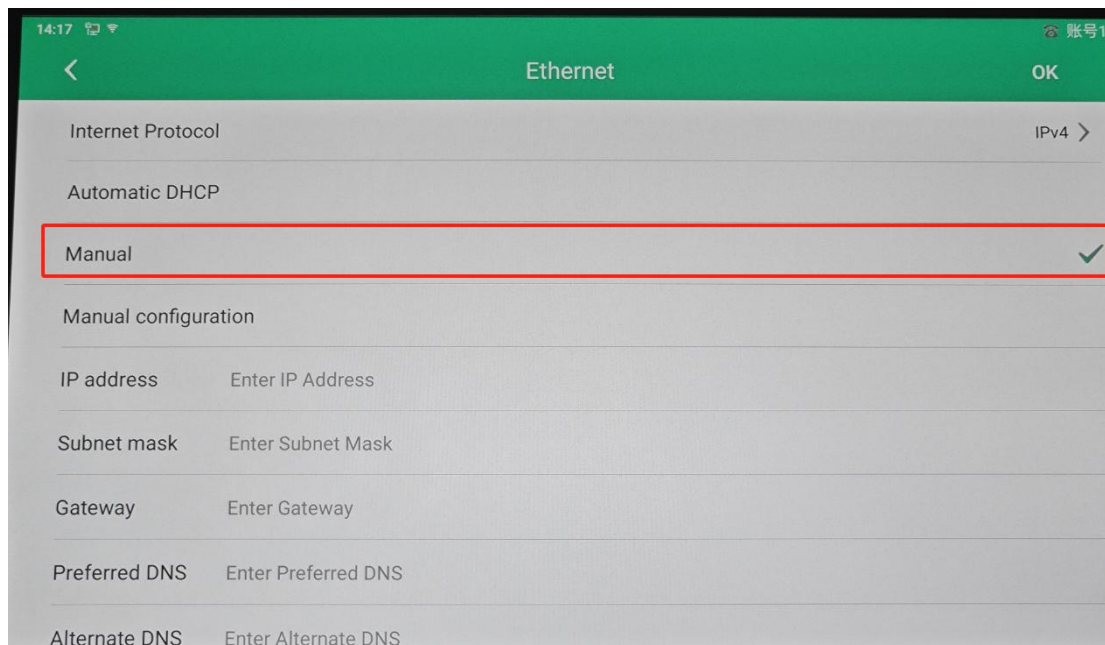

If you need to connect to WIFI, pull down from the top of the screen, long press the Wi-Fi icon.

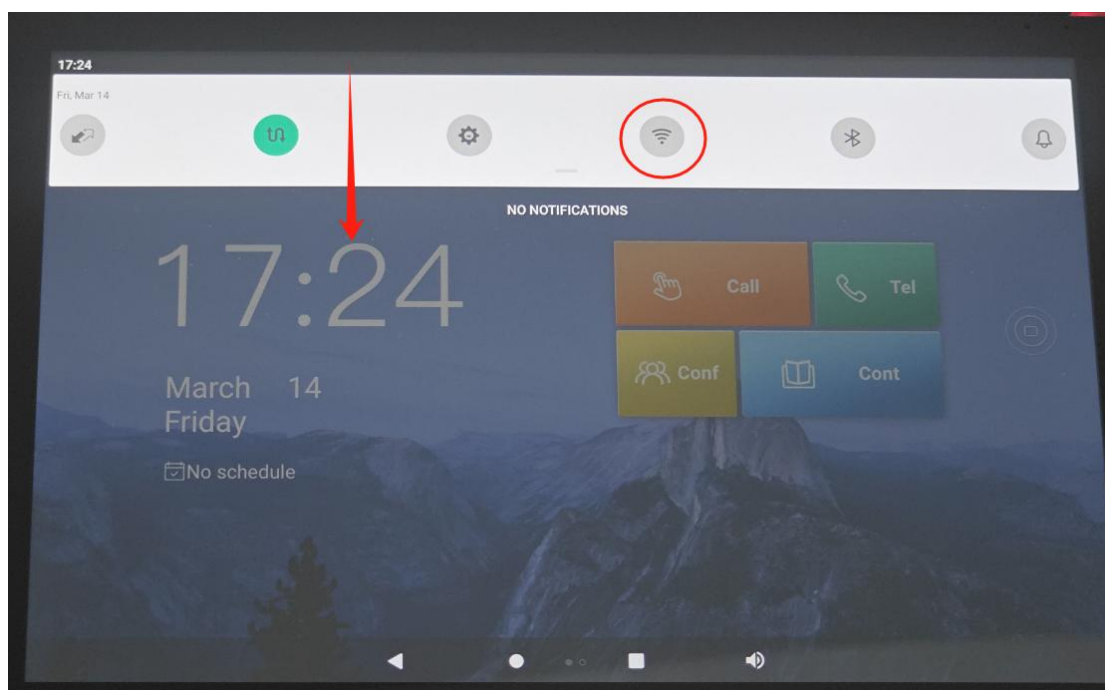


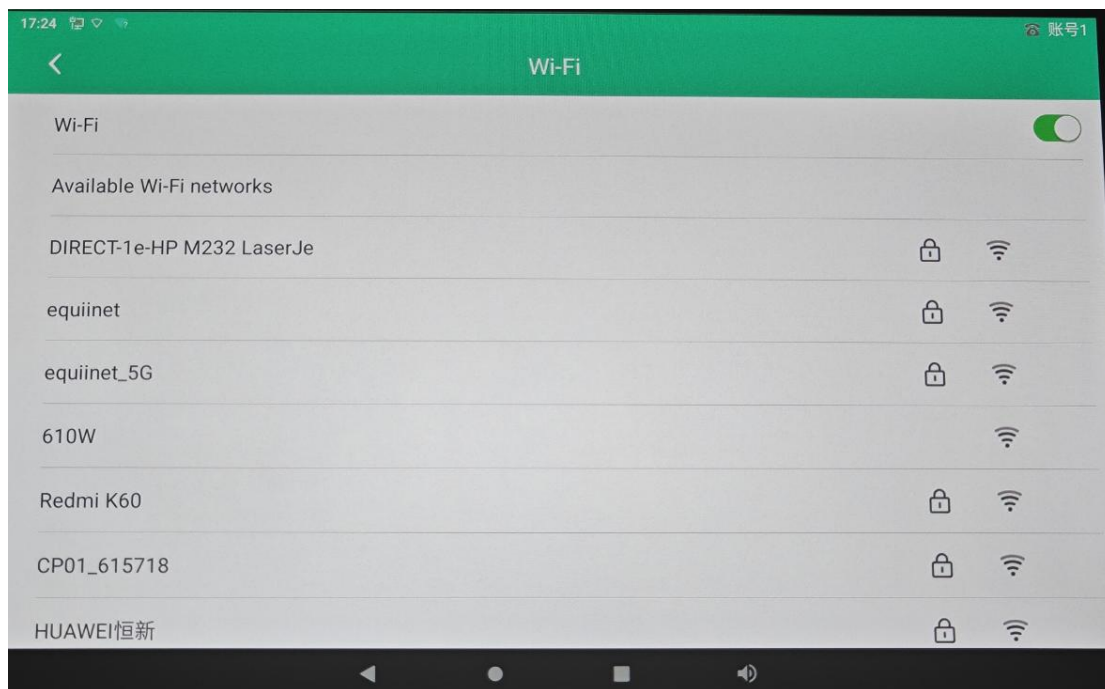


3. Enter the IP on the browser(recommend Google Chrome)

Default username: admin

Default password: Admin@123

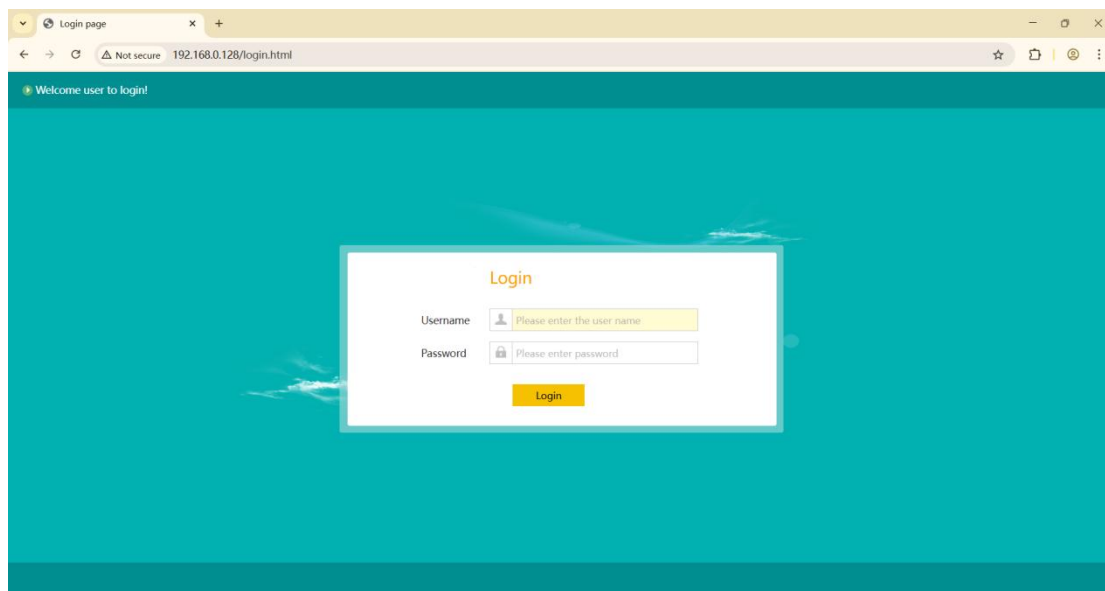


4. Network Setting.

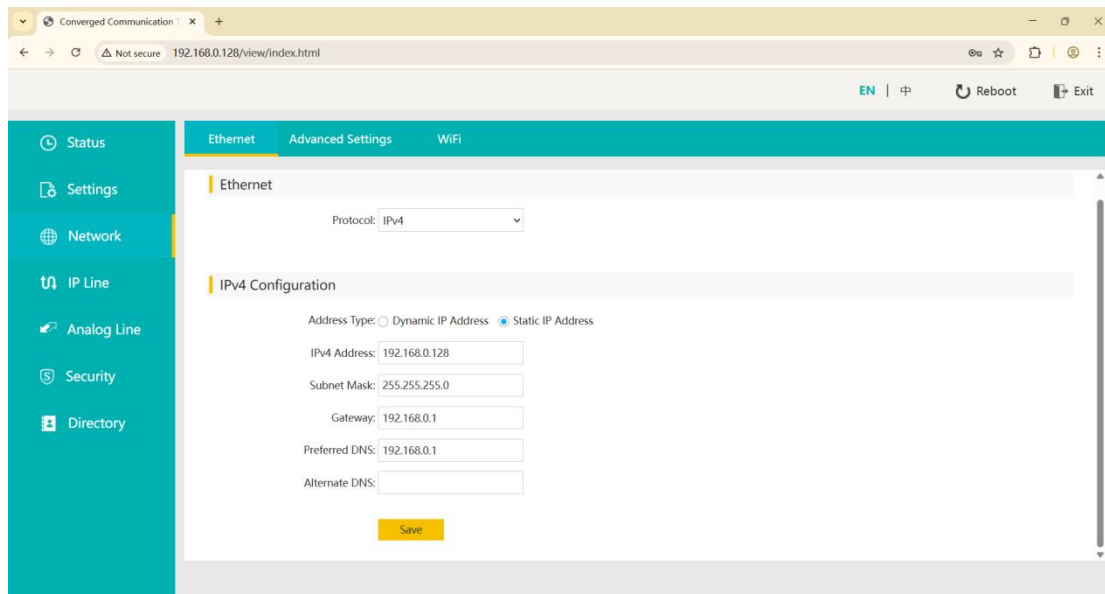


5. SIP Setting

IP Line>Account. The pic below only for reference, fill in your actual info please. Then scroll down to save.

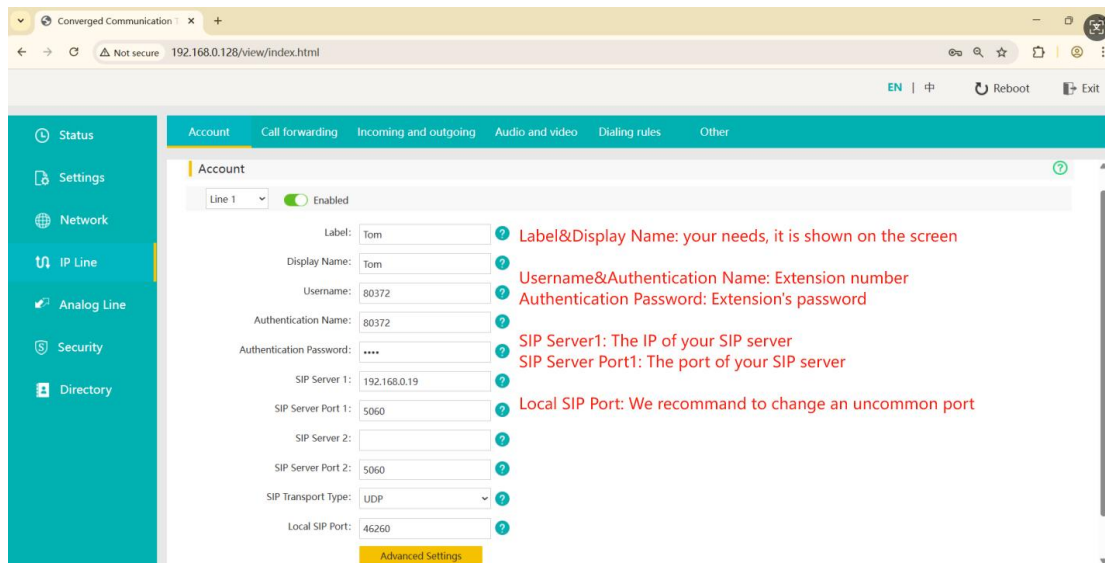



After setting, you can go back to status page to check if it's registered.

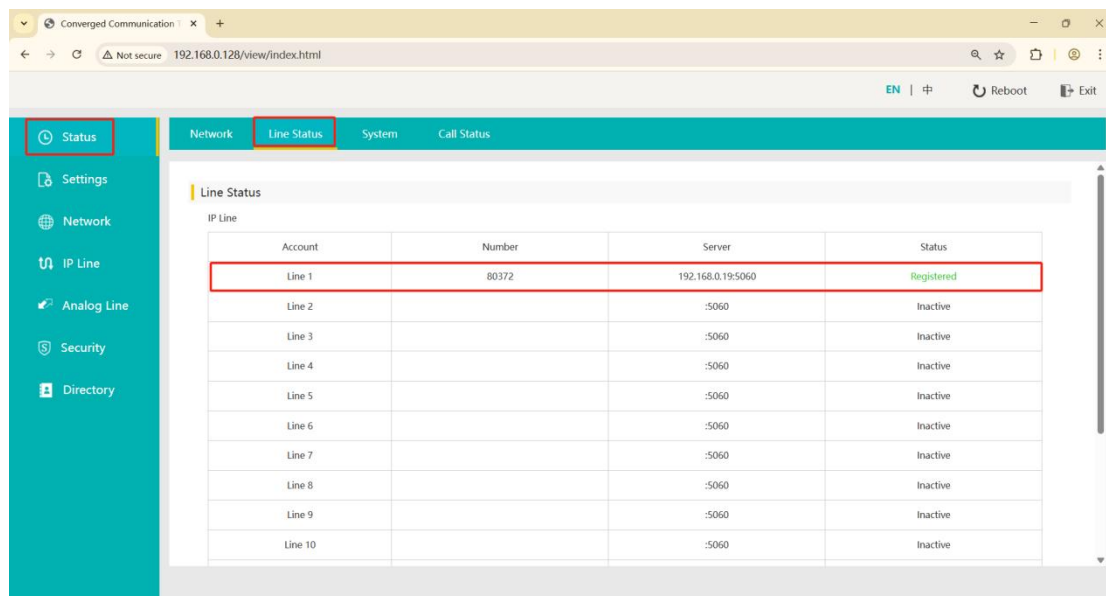

Codecs Settings

Audio Codecs. Entering **IP Line>Audio&Video**, If you do not need such G.722 codecs etc. We recommend only enable G.711U(PCMU)&G.711A(PCMA). Then scroll down to save.

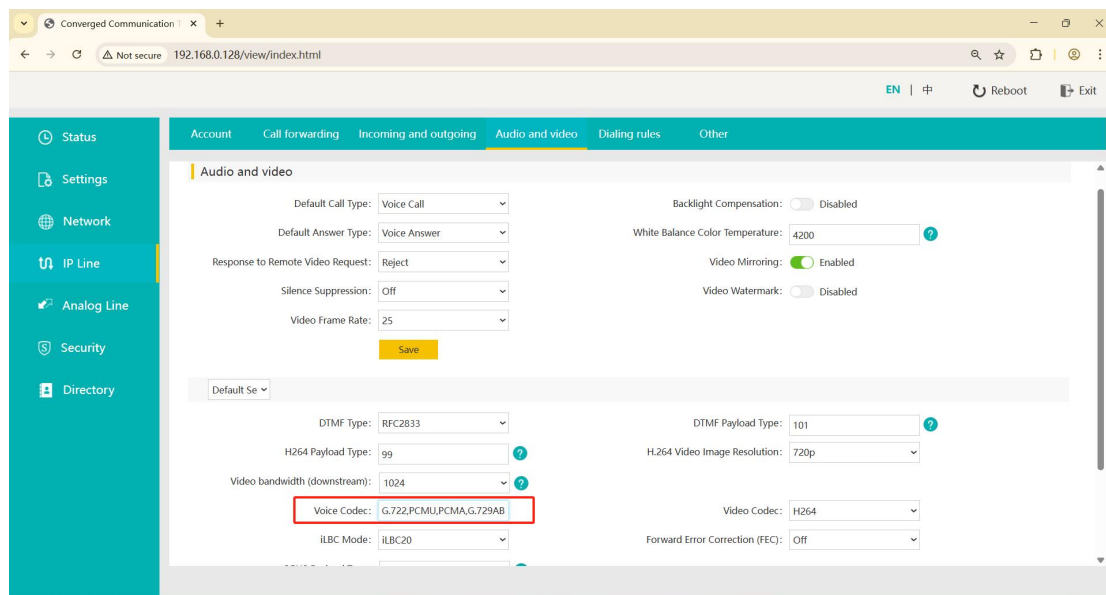


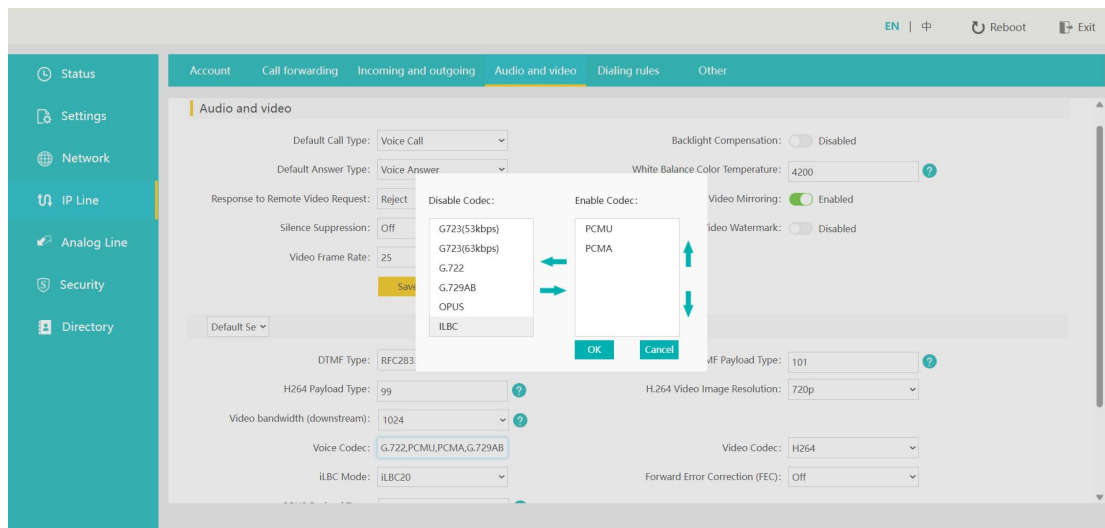

6. DSS key Setting.

DSS key is an easy way to call someone with a single click on the phone screen rather than dial the extension number.

Enter **DSS key page** to set. We need to create a main group first, then create a subgroup. Add the extensions you want to dial in this subgroup.

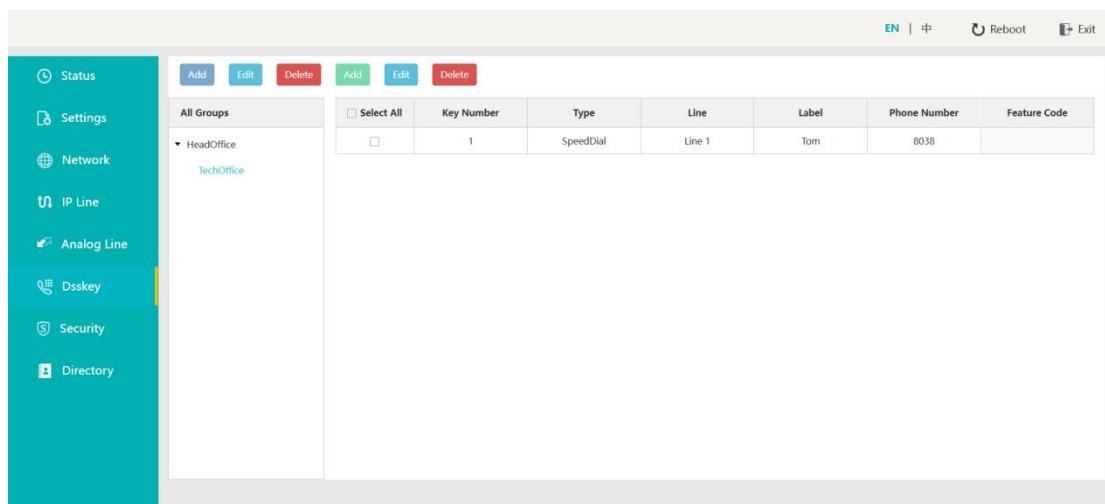


Type: SpeedDial

Line: select your SIP Line


Label: the name shown on the screen

Phone number: the extension you want to call.

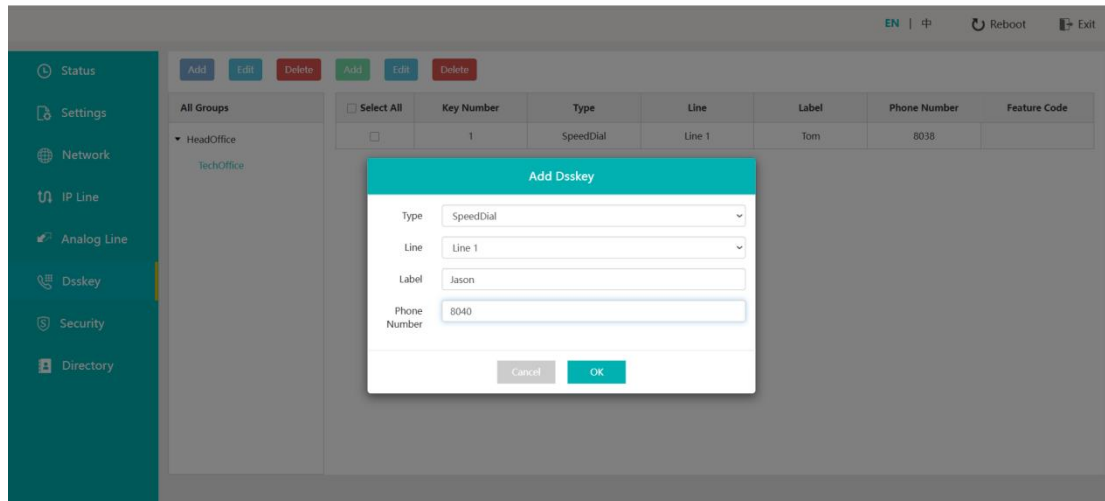

Entering the “Broad” button on the phone screen. The DSS key is here.

You can call Tom with a single click now.

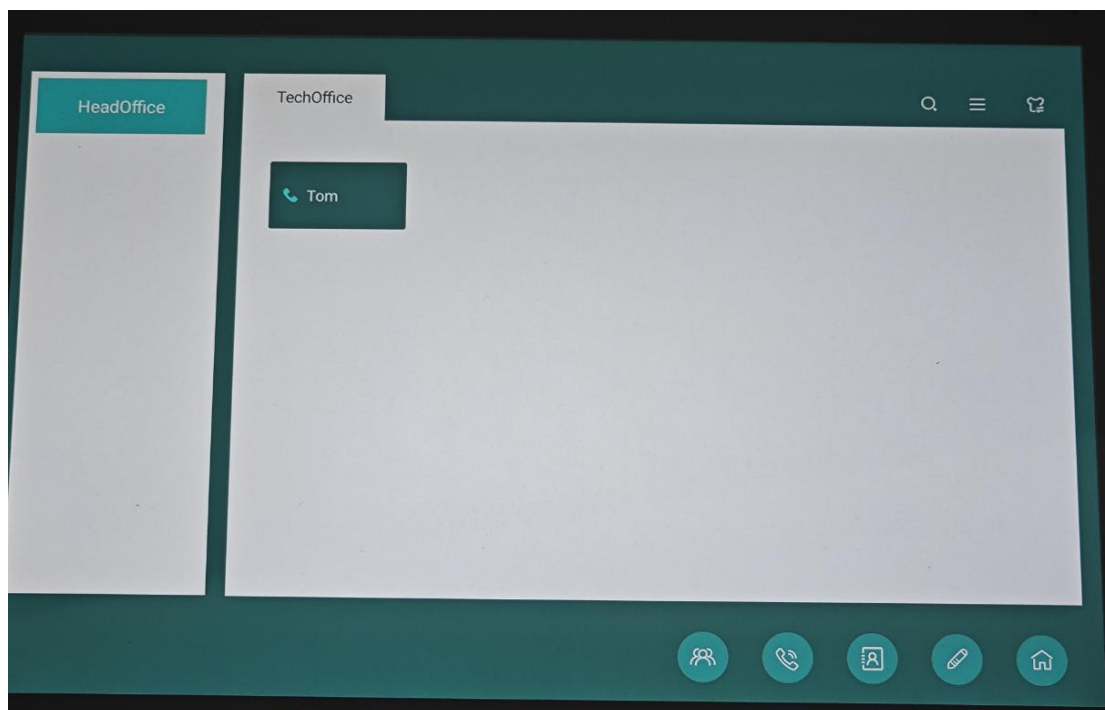

7. Call forwarding Setting.

Entering IP Line>Call forwarding

You can turn on the forwarding type, and input the number you want to forward to. Then scroll down to save the setting.

EN | 中 Reboot Exit

StatusSettingsNetworkIP LineAnalog LineSecurityDirectory

AccountCall forwardingIncoming and outgoingAudio and videoDialing rulesOther

Call forwarding

Default Se

Always Forward: On Off

Target Number: 8019

On Code:

Off Code:

Busy Forward: On Off

Target Number:

On Code:

Off Code:

No Answer Forward: On Off

Target Number: